



~2900 r.p.m. **VY(R)80-250**

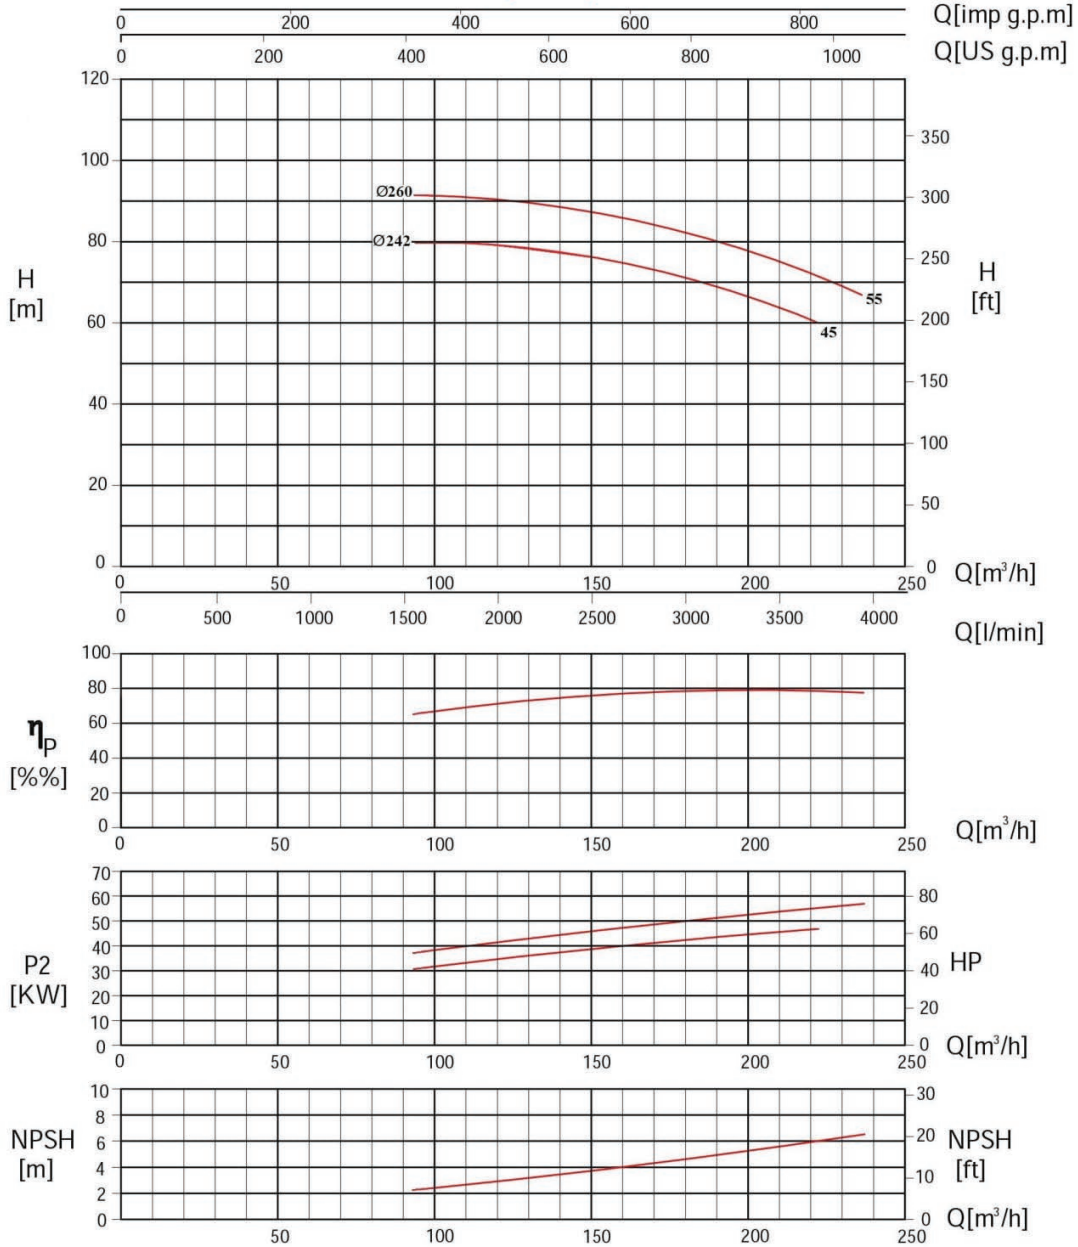

TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)												
			0	93	105	117	129	141	153	165	177	192	207	222	237
			0	1550	1750	1950	2150	2350	2550	2750	2950	3200	3450	3700	3950
			H(m)pump input power(KW)												
VY(R)80-250/45	45	225M	77,2	80,0	79,0	77,5	75,3	73,1	71,0	69,0	67,0	64,5	61,8	58,8	
VY(R)80-250/55	55	250M	90,0	92,8	91,1	89,3	87,4	85,4	83,1	80,7	78,5	75,7	72,4	68,8	65,2

Ghi chú: VY là bơm điện  
VYR là đầu bơm


## ~ 2900 r.p.m. **VY(R)100-200**

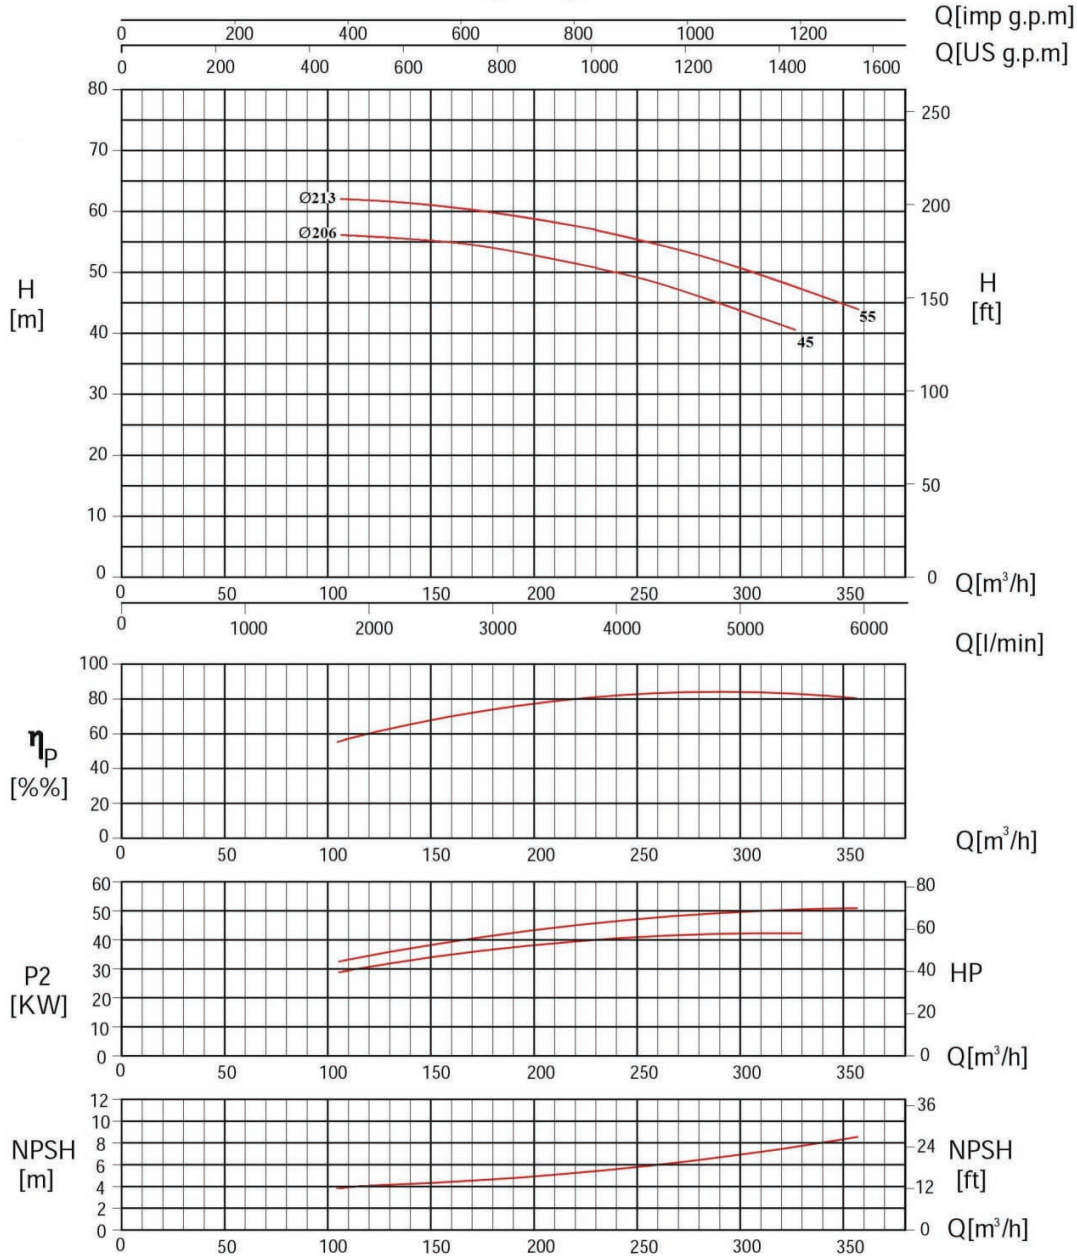

TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)															
			0	105	117	129	141	153	165	177	192	207	222	237	267	297	327	357
			0	1750	1950	2150	2350	2550	2750	2950	3200	3450	3700	3950	4450	4950	5450	5950
H(m)pump input power(KW)																		
VY(R)100-200/45	45	225M	56.8	56.5	56.1	55.6	55.1	54.5	53.9	53.1	52.2	51.4	50.4	47.5	43.8	39.7	35.5	
VY(R)100-200/55	55	250M	61.1	62.2	61.8	61.5	61.0	60.5	59.9	59.5	58.9	58.3	57.4	56.4	53.8	50.6	48.8	42.5

Ghi chú: VY là bơm điện  
VYR là dầu bơm

~2900 r.p.m. **VY(R)100-250**

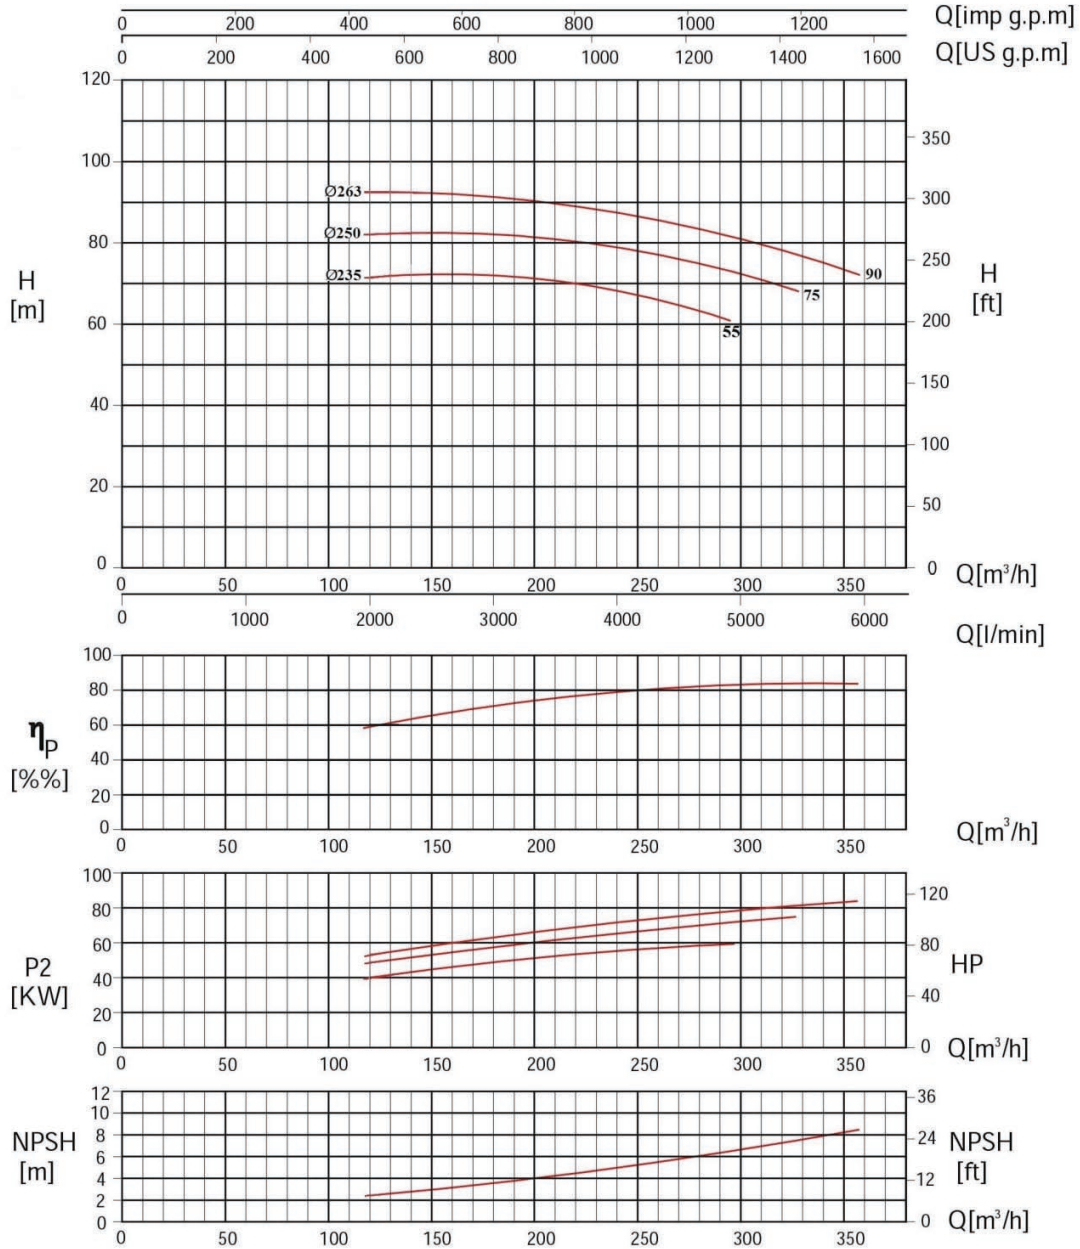


TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)														
			0	117	129	141	153	165	177	192	207	222	237	267	297	327	357
			0	1950	2150	2350	2550	2750	2950	3200	3450	3700	3950	4450	4950	5450	5950
H(m)pump input power(KW)																	
VY(R)100-250/55	55	250M	71,9	73,2	73,1	72,9	72,6	72,2	71,8	71,1	70,3	69,3	67,9	64,7	61,0		
VY(R)100-250/75	75	280S	83.6	83.7	83.5	83.2	82.9	82.5	82.1	81.4	80.8	80.0	79.0	76.4	72.0	67.6	
VY(R)100-250/90	90	280M	93.5	93.9	93.7	93.4	92.9	92.4	91.8	90.9	89.9	88.8	87.4	84.0	80.4	75.8	73.2

Ghi chú: VY là bơm điện  
VYR là đầu bơm




~2900 r.p.m. **VYR125-250/90**

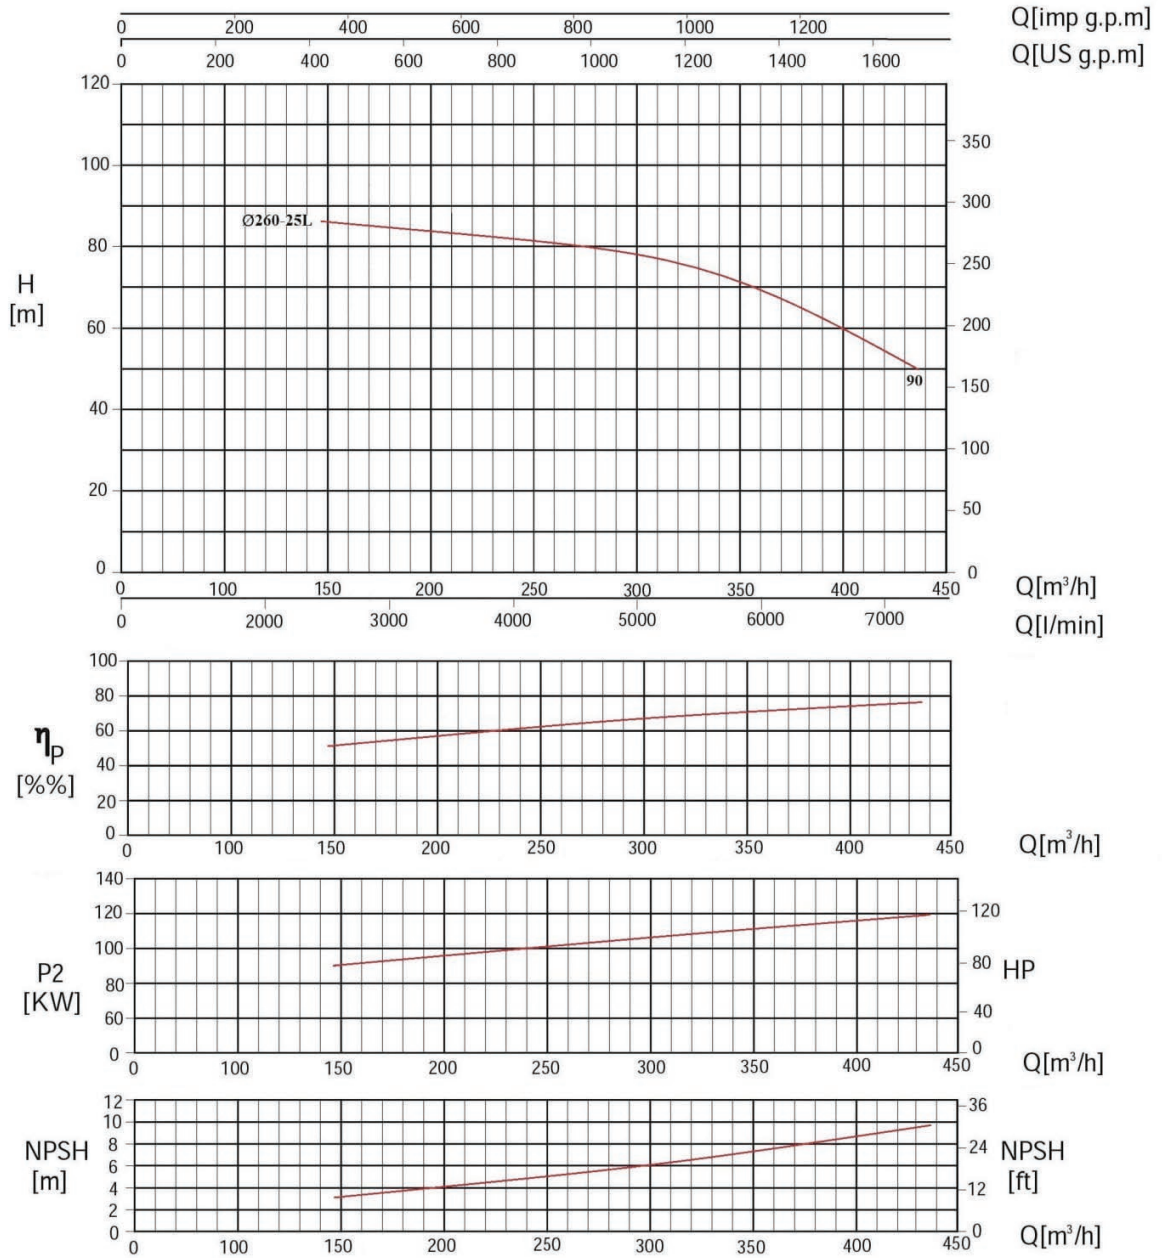

TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)									
			0	147	207	283	348	382	407	420	436	
			0	2450	3450	4717	5800	6367	6783	7000	7267	
			H(m)pump input power(KW)									
VYR125 - 250L/90	90	280M	86.0	85.3	82.5	76.4	70.6	65.2	60.1	55.0	50.2	




~ 2900 r.p.m.

## VYR125-250/110

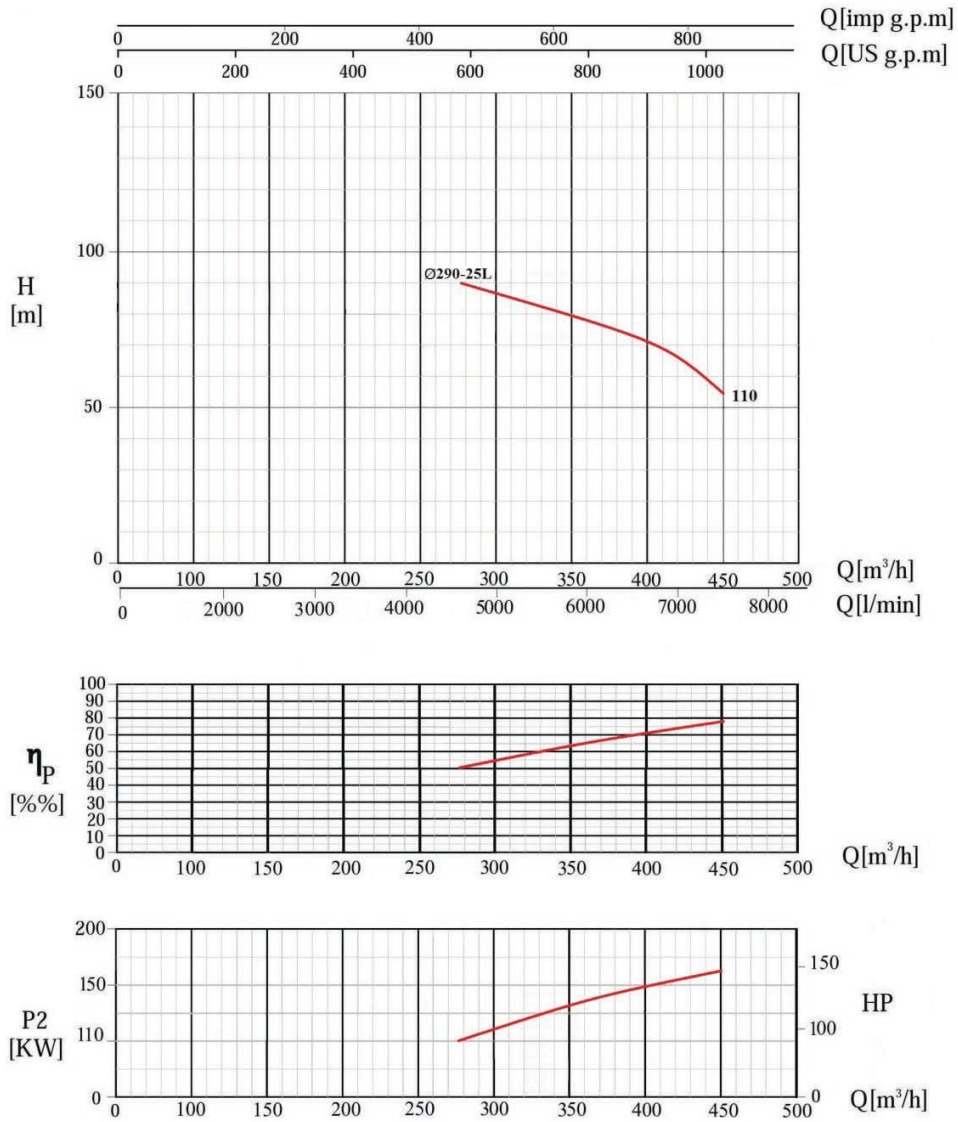

TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)					
			0	277	315	406	443	450
			0	4617	5250	6767	7383	7500
			H(m)pump input power(KW)					
VYR 125 - 250/110	110	315S	100	90.1	80.3	70.2	60.4	55.0




## ~2900 r.p.m. **VYR 125 - 250/160**

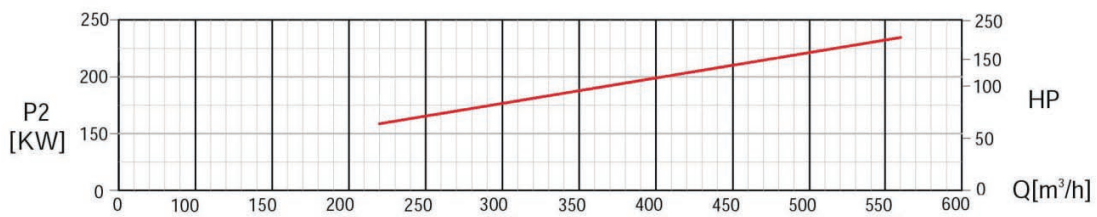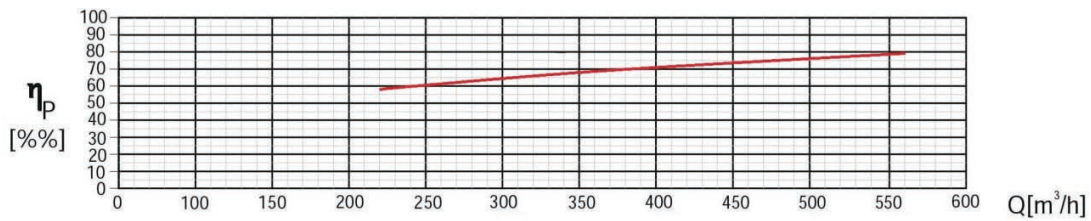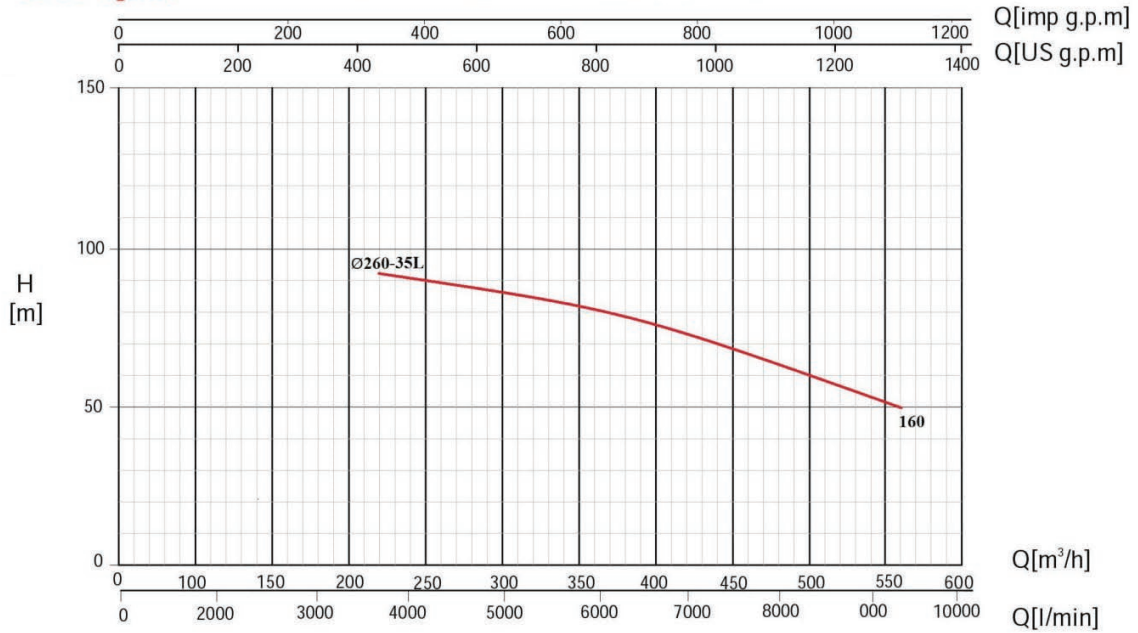

TYPE	Nominal Power (KW)	Motor Size	Q(m <sup>3</sup> /h - l/min)							
			0	221	316	367	412	442	504	560
			0	3683	5267	6117	6867	7367	8400	9333
			H(m)pump input power(KW)							
VYR125 - 250/160	160	315S	93.0	93.5	85.6	80.3	75.0	70.3	60.4	50.2




**~2900 r.p.m. VYR 125 - 250 /132**

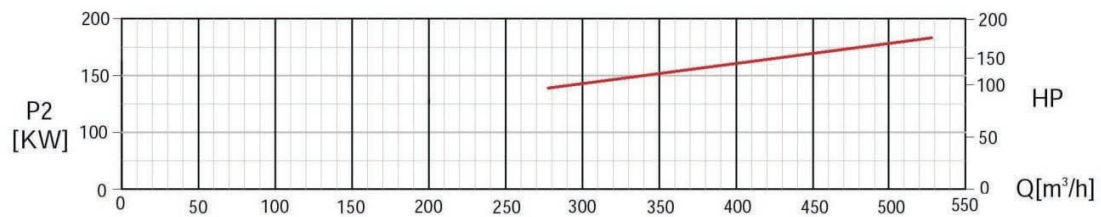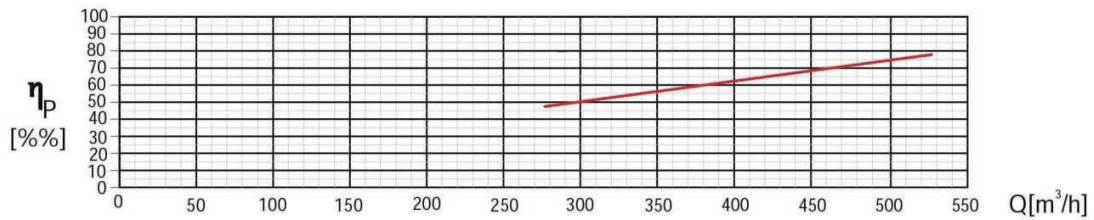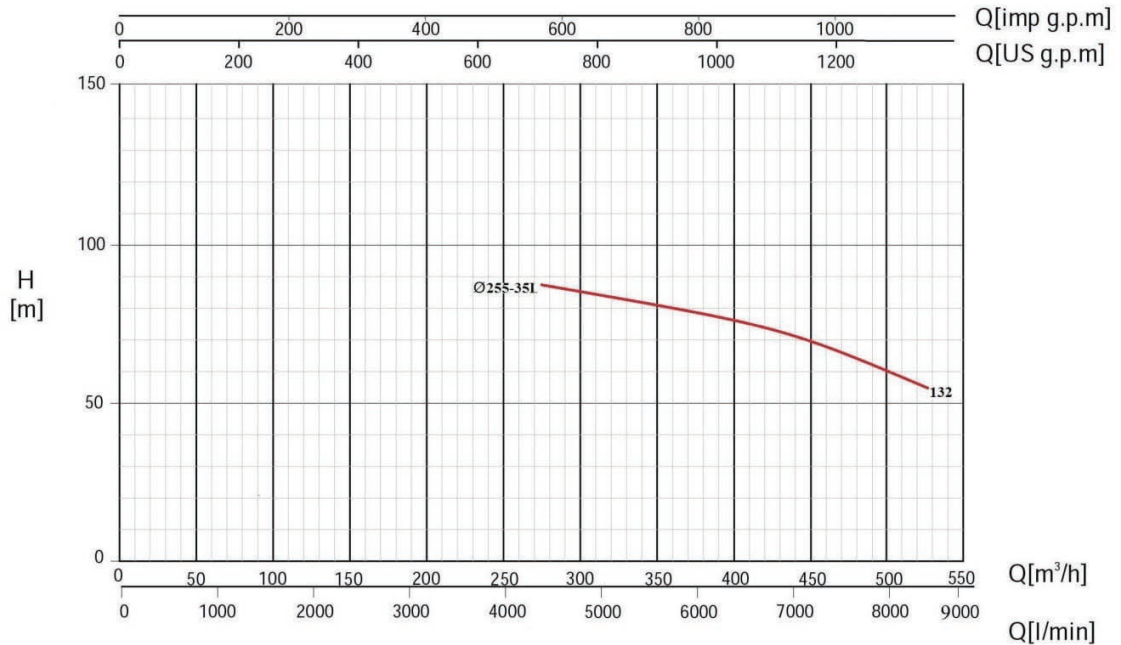

TYPE	Nominal Power (KW)	Motor Size	Q(m³/h - l/min)							
			0	279	347	400	444	478	515	528
			0	4650	5783	6667	7400	7967	8583	8800
H(m)pump input power(KW)										
VYR 125 - 250 /132	132	315S	90.0	86.1	80.0	75.2	70.3	65.4	60.0	55.2

~2900 r.p.m. **VYR 125 - 250 / 200**

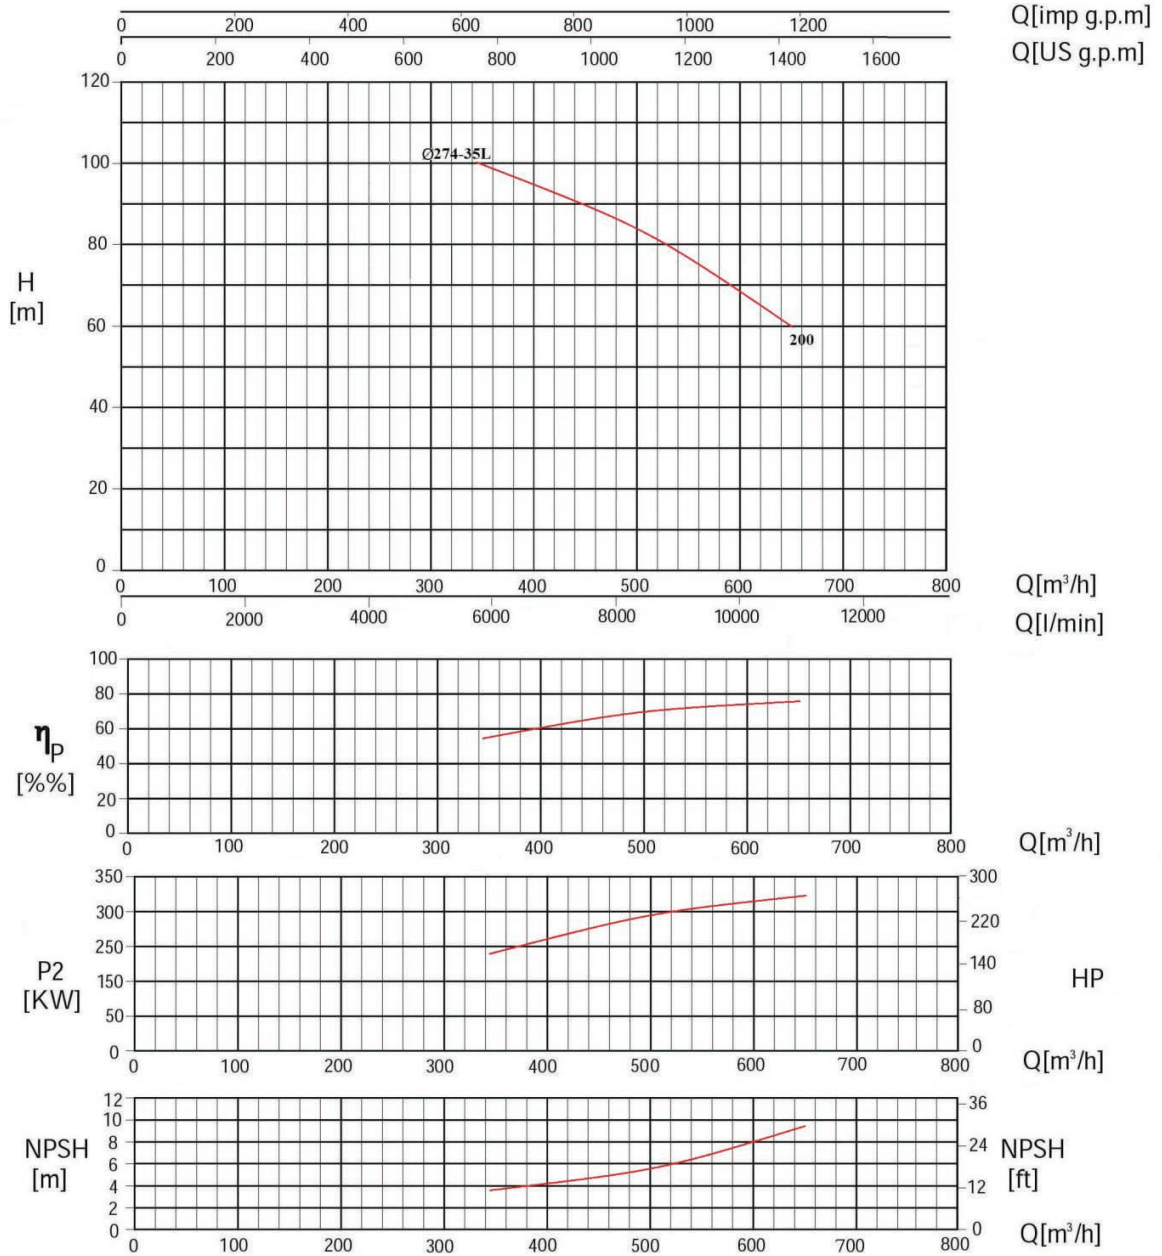

TYPE	Nominal Power (KW)	Motor Size	Q (m³/h - l/min)								
			0	346	402	441	486	532	547	583	650
			0	5767	6700	7350	8100	8867	9117	9717	10833
			H(m)pump input power(KW)								
VYR 125 - 250 / 200	200	315L	105.0	100.2	95.8	90.4	85.6	80.1	75.5	70.7	60.2